

Version 1.4

# VIVID S 160

## SILICONE 24V



**For More Information**

**Toll Free: 1 (888) 580-6366**



Version 1.4 | Specifications are subject to change without notice.

## Available Colors

Color	CCT Wavelength
Red	618-624nm
Green	522-528nm
Blue	468-474nm
Amber	588-594nm
Orange	600 -610nm
2200K	2238 ± 102K
2700K	2725 ± 145K
3000K	3045 ± 175K
3500K	3045 ± 175K
4000K	3985 ± 275K
5700K	5669 ± 355K

## Lumen Count

Color	Per Foot	Per Meter
Red	>39.63lm	>130lm
Green	>106.71lm	>350lm
Blue	>21.34lm	>70lm
Amber	>39.63lm	>130lm
Orange	>39.63lm	>130lm
2200K	>97.56lm	>320lm
2700K	>109.76lm	>360lm
3000K	>121.95lm	>400lm
3500K	>121.95lm	>400lm
4000K	>121.95lm	>400lm
5700K	>121.95lm	>400lm

### \*Color Jackets:

For standard or custom color jacket options, contact your Account Manager. Min. order quantity of 656ft (200m).

## CRI90

### Available Colors

Color	CCT
2200K	2238 ± 102K
2700K (WW)	2725 ± 145K
3000K	3045 ± 175K
3500K (W)	3465 ± 245K
4000K	3985 ± 275K

### Lumen Count


Color	Per Foot	Per Meter	Power
2200K	>85.34lm	>280lm	3.66W/ft (12W/m)
2700K (WW)	>85.34lm	>280lm	3.66W/ft (12W/m)
3000K	>97.54lm	>320lm	3.66W/ft (12W/m)
3500K (W)	>97.54lm	>320lm	3.66W/ft (12W/m)
4000K	>97.54lm	>320lm	3.66W/ft (12W/m)

For 2200K: Minimum order quantity of 100 meters.


Version 1.4 | Specifications are subject to change without notice.



**Light Profile**

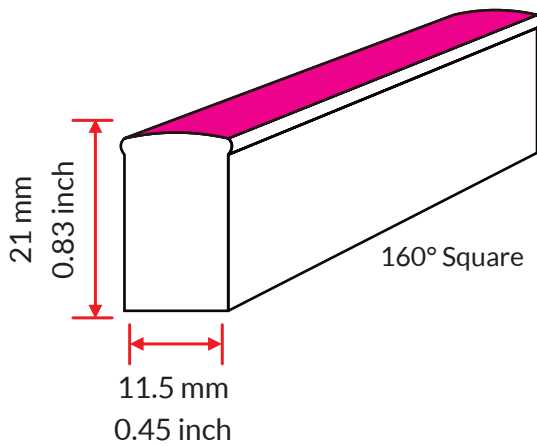

**Bending Direction**

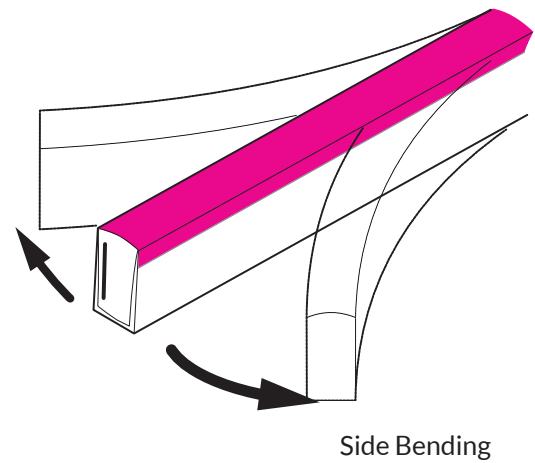

**Minimum Bending Diameter**

