

VIVID SILICONE 24V WAVE MINI STATIC

Table of Contents

Specifications

| | | | |
|--------------------------|-----|--------------------|-----|
| Technical Specifications | 2-3 | Mounting Hardware | 6 |
| | | Plastic & Aluminum | 6 |
| Physical Specifications | 3 | Packaging | 7 |
| Part Number Naming | 4 | Testing | 7-8 |
| Connectors | 5-6 | Charts | 7 |
| Seamless | 5 | Certifications | 8 |
| Swivel | 6 | Fixture Testing | 8 |
| Male & Female | 6 | | |


Technical Specifications

| Available Colors | | Lumen Count | | | |
|------------------|----------------|-------------|----------|-----------|-------------------|
| Color | CCT Wavelength | Color | Per Foot | Per Meter | Power |
| Red | 618-624nm | Red | >24.39lm | >80lm | 1.37W/ft (4.5W/m) |
| Green | 522-528nm | Green | >67.07lm | >220lm | 1.37W/ft (4.5W/m) |
| Blue | 468-474nm | Blue | >15.24lm | >50lm | 1.37W/ft (4.5W/m) |
| Amber | 588-594nm | Amber | >24.39lm | >80lm | 1.37W/ft (4.5W/m) |
| 2200K | 2238 ± 102K | 2200K | >64lm | >210lm | 1.37W/ft (4.5W/m) |
| 2700K | 2725 ± 145K | 2700K | >64lm | >210lm | 1.37W/ft (4.5W/m) |
| 3000K | 3045 ± 175K | 3000K | >64lm | >210lm | 1.37W/ft (4.5W/m) |
| 3500K | 3045 ± 175K | 3500K | >64lm | >210lm | 1.37W/ft (4.5W/m) |
| 4000K | 3985 ± 275K | 4000K | >64lm | >210lm | 1.37W/ft (4.5W/m) |
| 5700K | 5669 ± 355K | 5700K | >64lm | >210lm | 1.37W/ft (4.5W/m) |


*Color Jackets:

For standard or custom color jacket options, contact your Account Manager. Min. order quantity of 656ft (200m).


Physical Specifications

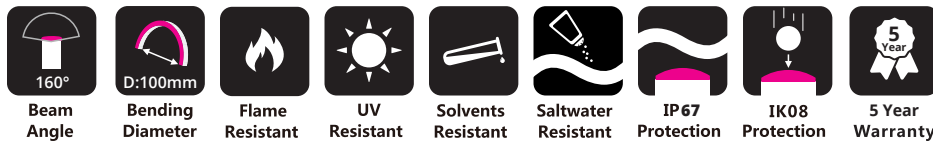

Bending Direction

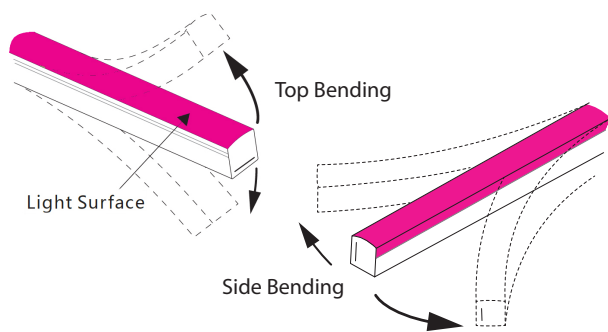

Light Profile

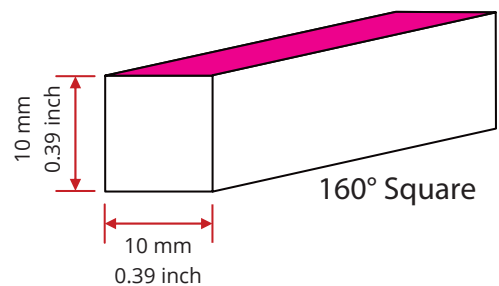

Minimum Bending Diameter

