



Version 1.5

VIVID

S 270

SILICONE 24V



For More Information

Toll Free: 1 (888) 580-6366



Version 1.5 | Specifications are subject to change without notice.

Available Colors

Color	CCT Wavelength
Red	618-624nm
Green	522-528nm
Blue	468-474nm
Amber	588-594nm
Orange	600-610nm
2200K	2238 ± 102K
2700K	2725 ± 145K
3000K	3045 ± 175K
3500K	3045 ± 175K
4000K	3985 ± 275K
5700K	5669 ± 355K

Lumen Count

Color	Per Foot	Per Meter
Red	>42.67lm	>140lm
Green	>112.80lm	>370lm
Blue	>24.39lm	>80lm
Amber	>42.67lm	>140lm
Orange	>27.43lm	>90lm
2200K	>116lm	>380lm
2700K	>143lm	>470lm
3000K	>143lm	>470lm
3500K	>143lm	>470lm
4000K	>143lm	>470lm
5700K	>143lm	>470lm

*Color Jackets:

For standard or custom color jacket options, contact your Account Manager. Min. order quantity of 656ft (200m).

CRI90

Available Colors

Color	CCT
2200K	2238 ± 102K
2700K (WW)	2725 ± 145K
3000K	3045 ± 175K
3500K (W)	3465 ± 245K
4000K	3985 ± 275K

Lumen Count


Color	Per Foot	Per Meter	Power
2200K	>97.54lm	>320lm	3.66W/ft(12W/m)
2700K (WW)	>97.54lm	>320lm	3.66W/ft(12W/m)
3000K	>97.54lm	>320lm	3.66W/ft(12W/m)
3500K (W)	>97.54lm	>320lm	3.66W/ft(12W/m)
4000K	>97.54lm	>320lm	3.66W/ft(12W/m)

For 2200K: Minimum order quantity of 100 meters.


Version 1.5 | Specifications are subject to change without notice.



Light Profile

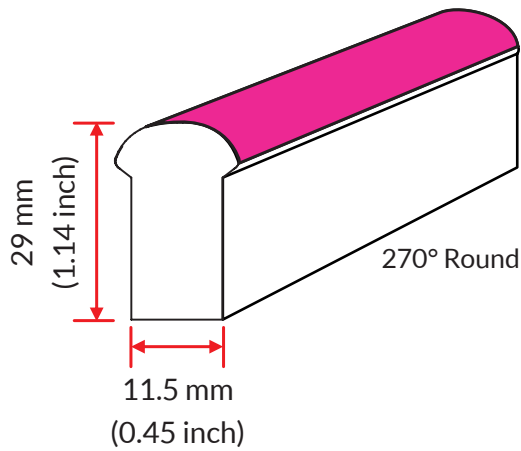

Bending Direction

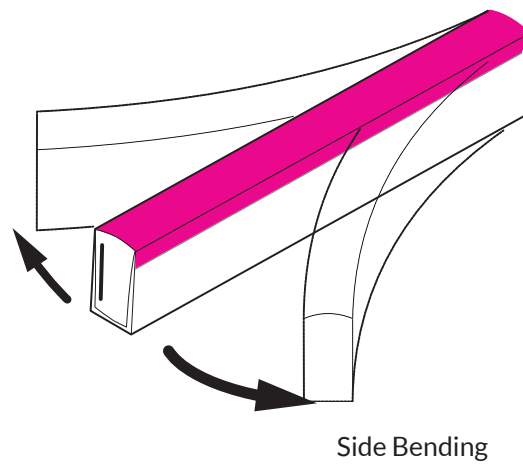

Minimum Bending Diameter

