



Version 1.6

VMD


# WAVE

## SILICONE 24V



**For More Information**

**Toll Free: 1 (888) 580-6366**

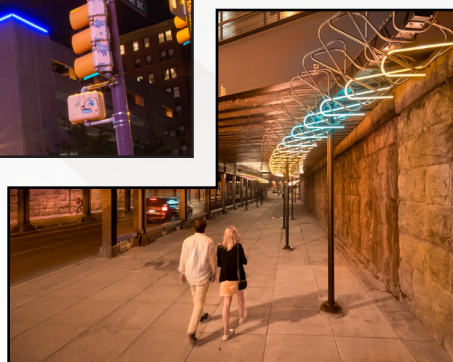

Version 1.6 | Specifications are subject to change without notice.

## CRI90

### Available Colors

Color	CCT
2200K	2238 ± 102K
2700K (WW)	2725 ± 145K
3000K	3045 ± 175K
3500K (W)	3465 ± 245K
4000K	3985 ± 275K

### Lumen Count

### Top Bending

### Side Bending

Color	Per Foot	Per Meter	Per Foot	Per Meter
2200K	>140.21lm	>460lm	>128.02lm	>420lm
2700K (WW)	>140.21lm	>460lm	>128.02lm	>420lm
3000K	>140.21lm	>460lm	>128.02lm	>420lm
3500K (W)	>140.21lm	>460lm	>128.02lm	>420lm
4000K	>140.21lm	>460lm	>128.02lm	>420lm

For 2200K: Minimum order quantity of 100 meters.

### Available Colors

Color	CCT Wavelength
Red	618-624nm
Green	522-528nm
Blue	468-474nm
Amber	588-594nm
2200K	2238 ± 102K
2700K	2725 ± 145K
3000K	3045 ± 175K
3500K	3045 ± 175K
4000K	3985 ± 275K
5700K	5669 ± 355K

### Lumen Count

### Top Bending


### Side Bending

Color	Per Foot	Per Meter	Per Foot	Per Meter
Red	>56.40lm	>185lm	>50.29lm	>165lm
Green	>167.68lm	>550lm	>137.16lm	>450lm
Blue	>36.59lm	>120lm	>33.53lm	>110lm
Amber	>56.40lm	>185lm	>50.29lm	>165lm
2200K	>137.20lm	>450lm	>116lm	>380lm
2700K	>172lm	>565lm	>143lm	>470lm
3000K	>172lm	>565lm	>143lm	>470lm
3500K	>177lm	>580lm	>146lm	>480lm
4000K	>177lm	>580lm	>146lm	>480lm
5700K	>177lm	>580lm	>146lm	>480lm


Version 1.6 | Specifications are subject to change without notice.



**Bending Direction**

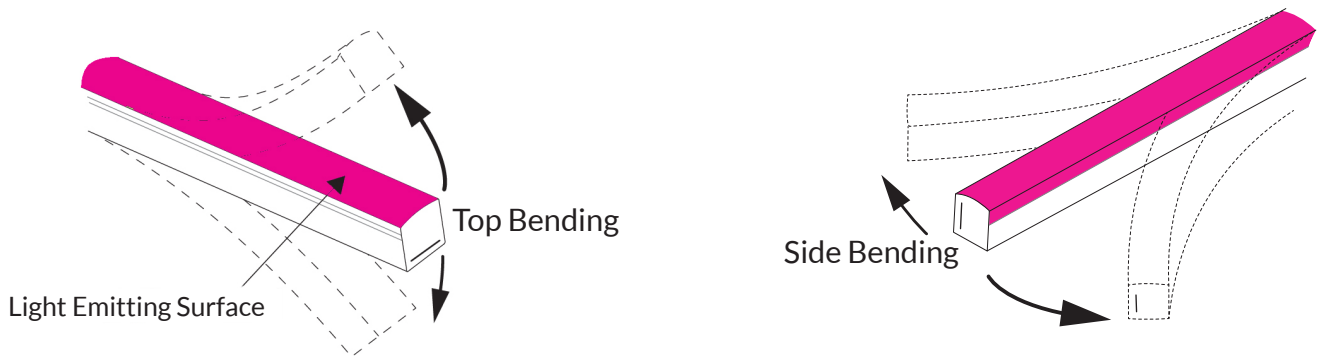

**Light Profile**

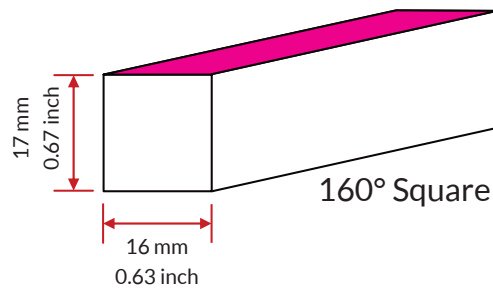

**Minimum Bending Diameter**

